


Automatic backwash for fine filters

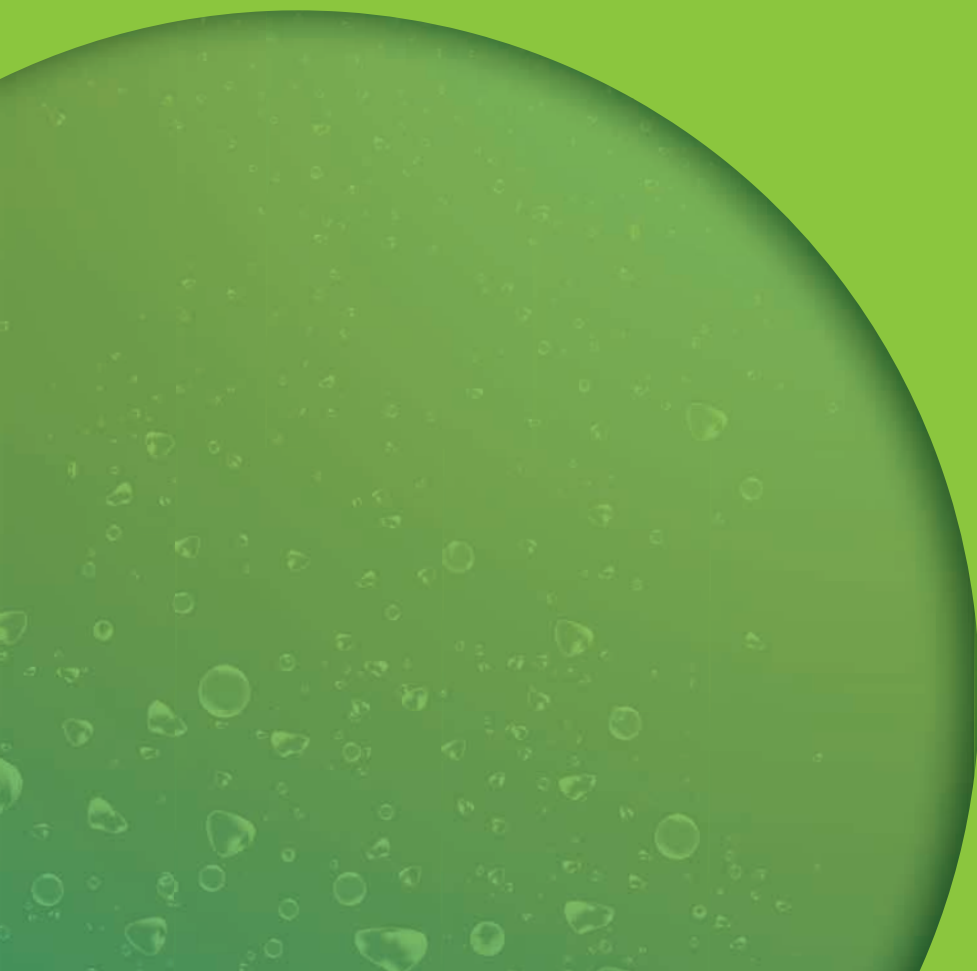

Automatic backwash for fine filters

For fully automatic, time-controlled cleaning of all backwashable fine filters. Interval setting via integrated operating buttons and LED display with indication of the set interval and the backwashes performed.

- Robust plastic housing (IP 55)
- Battery-supported protection system (4 x 1.5 Volt, LR 6, service life approx. 3 years)
- Maximum operating temperature of 40 °C



Automatic backwash

R ¾" to R 2"

DN 65 to DN 100

Article no.

450018

450082